

HPPL Series

HPPL12-560WF 12V150Ah

Sacredsun thin plate pure lead (TPPL) series batteries are designed as high power, high energy, long life batteries used in UPS and Telecom, which are fully automatic produced by Con-Casting-Punch-Paste (CCPP) plate manufacture technology, reliable assembly technology and intelligent formation technology. Pure lead grid due to its enhanced corrosion resistance ensures the battery long float service life and the duration at elevated temperature. Thin plate and optimized positive and negative plate active material design provide large chemical reaction surface area, high power density and low resistance cycle.



Benefits

- Specially designed for high-rate discharge
- Faster recharge
- High power density
- Design life 15 years at 25 °C (77 °F)
- Shelf life up to 2 years at 25 °C (77 °F)
- Wider operating temperature range: -40 °C to +60 °C (-40 °F to +140 °F)
- Container Material: PC-ABS flame retardant UL94-V0
- Easy and recommended upright installation


Applications

- Uninterruptible Power Supply (UPS)
- Data Centers
- Renewable energy
- Emergency Power Supply (EPS)
- Electrical Facilities

Standards

- IEC 60896-21/22: 2004
- JIS C8704-1/2: 2006
- EUROBAT guide

Drawing

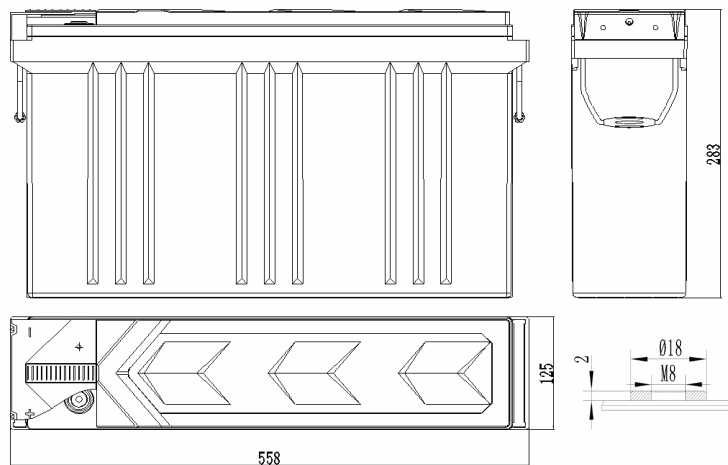

Specifications





| | | | | |
|--------------------------------------|--|---------------|---------------------|-------------------|
| Battery Model | HPPL12-560WF | | | |
| Design Life (years, 25°C) | 15 | | | |
| Capacity (25°C) | 10min (1.67V) | 15min (1.67V) | 1HR (103.7A, 1.80V) | 10HR (15A, 1.80V) |
| | 682.2W/cell | 560W/cell | 103.7Ah | 150 |
| Dimensions (mm) | Length | Width | Height | Total Height |
| | 558 | 125 | 283 | 283 |
| Approx. Weight (kg) | 46.5 | | | |
| Reference Internal Resistance (mΩ) | 2.9(fully charged @ 25°C) | | | |
| Maximum Discharge Current (A/5 Sec.) | 1800 | | | |
| Self-Discharge (25°C) | ≤ 2 % per month | | | |
| Charge Voltage (V/cell, 25°C) | Cycle use | | Float use | |
| | 2.35 (-3mV/°C/cell), max charge current: 90A | | 2.23 (-3mV/°C/cell) | |
| Short Circuit Current (A) | 4500 | | | |

Discharge Data

| Constant Current Discharge Data (25°C, A) | | | | | | | | | | | |
|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|
| End Voltage (V/cell) | min | | | | | h | | | | | |
| | 10 | 15 | 20 | 30 | 45 | 1 | 2 | 3 | 5 | 8 | 10 |
| 1.60 | 405.3 | 322.5 | 265.0 | 197.2 | 141.0 | 111.7 | 63.9 | 45.3 | 29.0 | 19.2 | 15.7 |
| 1.65 | 387.5 | 311.5 | 257.5 | 192.9 | 138.9 | 110.4 | 63.6 | 45.1 | 28.8 | 19.1 | 15.6 |
| 1.67 | 379.1 | 306.1 | 253.8 | 190.9 | 137.8 | 109.7 | 63.2 | 45.0 | 28.7 | 19.1 | 15.5 |
| 1.70 | 365.2 | 297.2 | 247.6 | 187.3 | 136.0 | 108.6 | 62.8 | 44.7 | 28.4 | 19.0 | 15.4 |
| 1.75 | 339.4 | 280.3 | 235.7 | 180.6 | 132.3 | 106.4 | 62.2 | 44.3 | 28.1 | 18.8 | 15.2 |
| 1.80 | 310.8 | 261.2 | 222.1 | 172.6 | 128.1 | 103.7 | 61.5 | 43.6 | 27.7 | 18.5 | 15.0 |

| Constant Power Discharge Data (25°C, W/cell) | | | | | | | | | | | |
|--|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|
| End Voltage (V/cell) | min | | | | | h | | | | | |
| | 10 | 15 | 20 | 30 | 45 | 1 | 2 | 3 | 5 | 8 | 10 |
| 1.60 | 720.0 | 584.2 | 486.5 | 368.6 | 271.0 | 218.2 | 125.8 | 90.1 | 57.8 | 38.5 | 31.3 |
| 1.65 | 694.4 | 567.9 | 475.3 | 362.3 | 267.7 | 216.2 | 125.4 | 89.7 | 57.6 | 38.3 | 31.2 |
| 1.67 | 682.2 | 560.0 | 469.8 | 359.2 | 266.0 | 215.1 | 125.1 | 89.6 | 57.4 | 38.2 | 31.1 |
| 1.70 | 661.8 | 546.7 | 460.4 | 353.8 | 263.1 | 213.2 | 124.5 | 89.1 | 56.9 | 38.0 | 31.0 |
| 1.75 | 623.3 | 521.2 | 442.4 | 343.4 | 257.5 | 209.7 | 123.5 | 88.2 | 56.5 | 37.7 | 30.8 |
| 1.80 | 580.0 | 492.2 | 421.7 | 331.0 | 250.7 | 205.4 | 122.3 | 87.0 | 55.7 | 37.2 | 30.5 |

Performance Curve

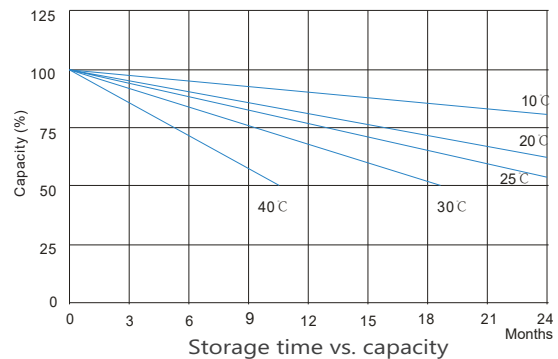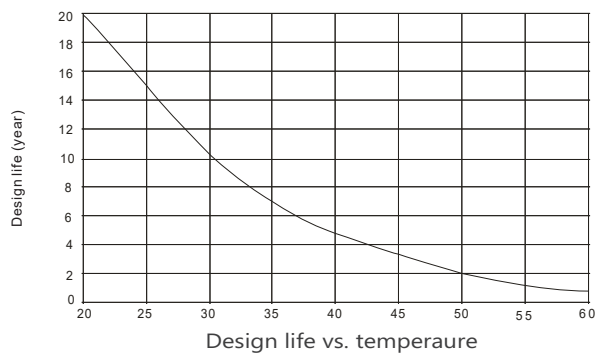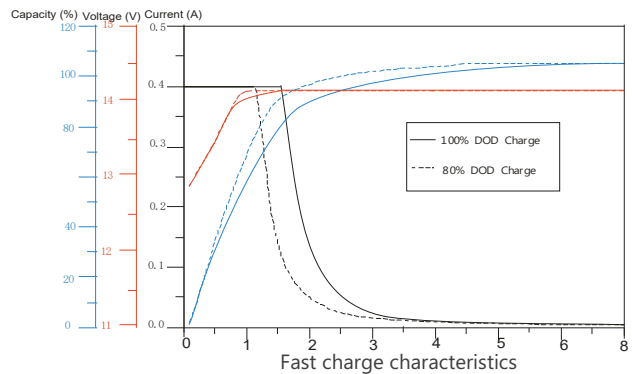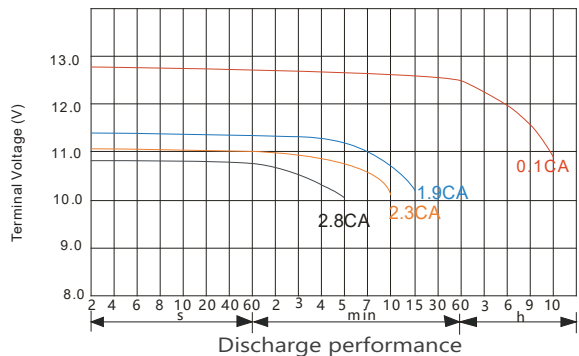

Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC
 Tel: +86-537-4422313 Fax: +86-537-4411980
 Email: sales@sacredsun.cn

Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong
 Email: admin.hk@sacredsun.hk

Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555
 Email: admin.sg@sacredsun.sg

Sacred Sun Europe SARRL

Add: ZAE Fontaine, 33210 Fargues, France
 Email: admin.eu@sacredsun.eu

Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE
 Email: admin.ae@sacredsun.ae

Sacred Sun reserves the right to change specifications or design without notice, please keep in touch with us for the latest information.

